

Poliflo FPO



POLIFLO FPO filter cartridges have been designed specifically for oil field applications and can be used as a polishing filter for injection water or to filter completion fluids, protecting the well and removing dirt from brines that can lead to a decrease in productivity.

POLIFLO FPO cartridges are manufactured in accordance with ISO9001 / QA system and utilise high performance filter media which is routinely evaluated for porosity, retention efficiency, dirt capacity and pressure loss to provide high performance in terms of cost per barrel filtered.


Cartridges are offered in industry standard lengths and with end fittings to suit existing filter housings.

Feature and Benefits

- Optimised for oil field applications
- Beta 5000 (99,98% efficiency)
- Polypropylene media
- Removal ratings from 1 to 100 micron absolute
- High surface area, up to 0,4 - 0,6 m²/10"
- Material conform with FDA 21 CFR part 177
- No fibre migration




Performance Characteristics

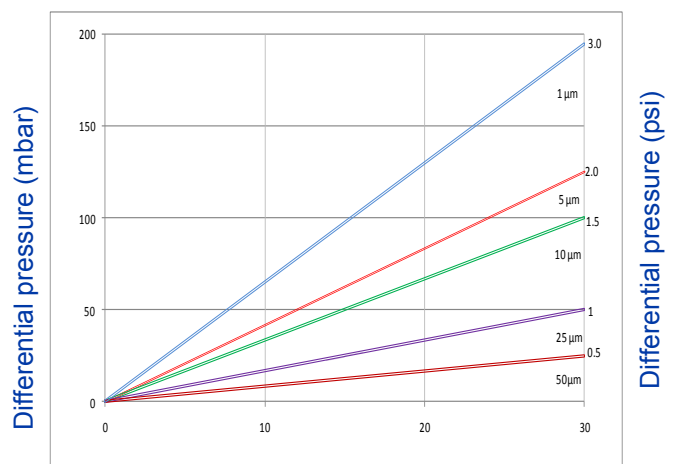


Flow (L/min) for liquid at 1 cp @ 20 °C
Pressure Loss / Flow for 10" Size (250 mm) cartridge


AVAILABLE CONFIGURATION

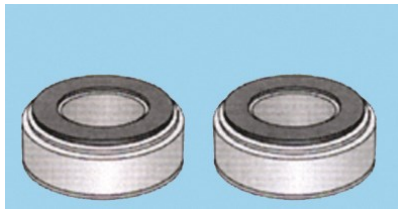

CODE 0

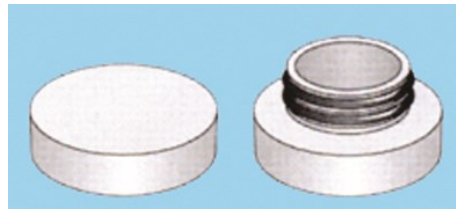

CODE 3

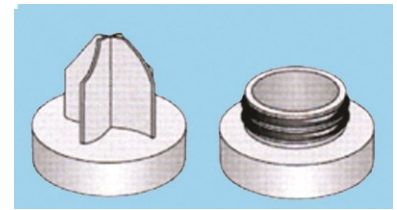

CODE 8

SPECIFICATIONS

Materials of construction

- Filtration media Options: Polypropylene
- Inner Support Core: Polypropylene
Nylon/ Stainless Steel
- Standard o-rings: EPDM, Viton, Nitrile

Cartridge Efficiency	
Published Rating (micron)	Absolute Efficiency (99.98%)
1 µm	1
5 µm	5
10 µm	10
25 µm	25
50 µm	50
75 µm	75
100 µm	100

Maximum Operating Conditions

PP Hardware	
Max Temperature	80°C (176 °F)
Max Differential pressure	4 bar (58 psi) at 20°C (68 °F) 1,2 bar (17,4 psi) at 65°C (149°F)
Recommended Change out:	2 bar (29 psi) at 20°C (68°F)

APPLICATIONS:


Injecton water
Waterflow and Waste Water
Workover
Completion and Stimulation Fluids
Brines
Acids
Methanol
Glycols
Amines
Diesel

POLIFLO FPO cartridges can be configured to be compatible to most oilfield chemicals. If in doubt, conduct a soak test or contact Fluxa

DIMENSIONS:

Outside diameter: 68 mm
Inside diameter: 28 mm
Lengths: 10" to 40"

ORDERING INFORMATION

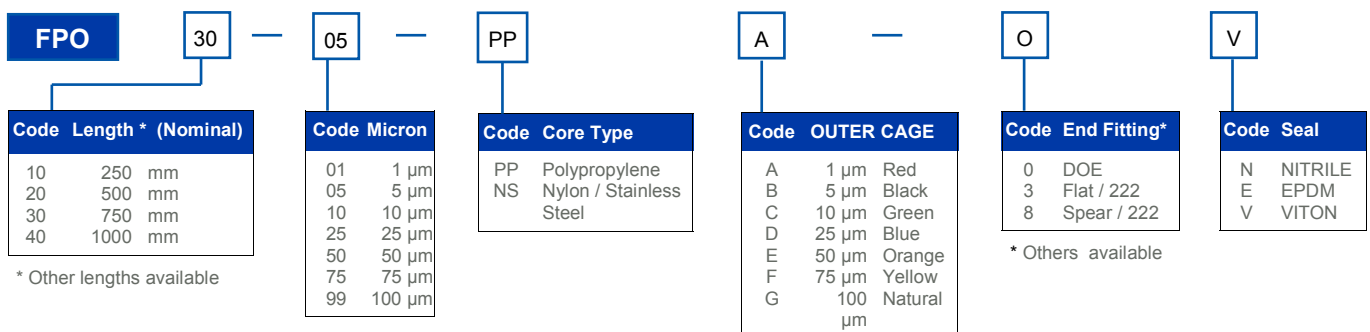

European Manufacturing, Sales & Service
Envirogen Group
Unit 9, Wimsey Way, Alfreton Trading Estate,
Alfreton, Derbyshire DE55 4LS,
United Kingdom
T: +(0)1531 636328
E: info@envirogen.com

European Sales & Distribution
Envirogen Technologies BV
Penningweg 71, 1507 DG Zaandam,
The Netherlands
T: +31 (0)75 204 72 00
E: ninfo@envirogen.com

Middle East Sales & Distribution
Envirogen Group
Block 115, Road 1510,
Building 737, Office 81,
Hidd, Kingdom of Bahrain
T: +973 13107790
E: infobahrain@envirogen.com