

PureChlor Compact




Chlorine Dioxide - A Powerful Disinfectant

Chlorine Dioxide is ideal for the treatment of onsite water. This system will continuously dose the break tank with trace levels of chlorine dioxide to control the feed levels of bacteria.

- Reduces bacteria levels quickly and effectively over a wide range of pH
- Efficient low chemical usage
- Robust, built on proven technology
- Compact system 1120mm - 1320mm (w)* x 520mm (d) x 1750mm (h)
- Easy to install
- Fully automated proportional dosing
- Simple to maintain
- PLC Control including chemical flow monitors
- Treats different water supplies through multiple POU facility.

*Options available: Internal or external storage tanks

Flow Diagram

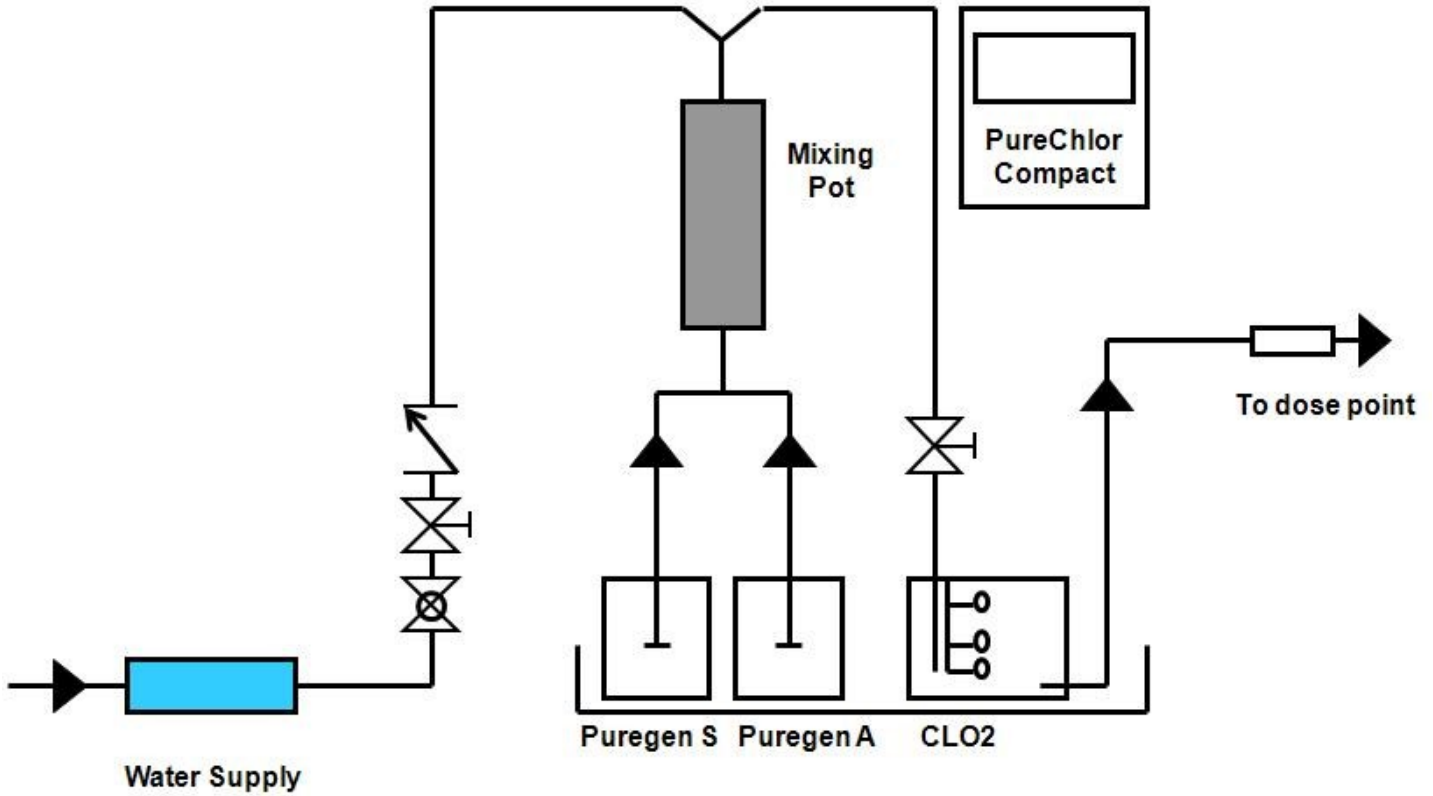

Technical Specification

Capacity	0.5m ³ / hr – 200m ³ /hr @ 1ppm ClO ₂
Power Requirements	240 Volts 13 or 32 AMP switch fuse (depending on chosen options)
Dimensions	1120mm - 1320mm (w) x 520mm (d) x 1750mm (H)
Water Supply	2 - 6 bar Ideally softened or RO treated but can treat towns mains supply



UK Office:

Envirogen Water Technologies
Unit 14a Bromyard Road Trading Estate
Bromyard Road, Ledbury
Herefordshire HR8 1NS
Tel: +44 (0) 1531 636328
E: info@envirogen.com
www.envirogen.com



Italian Office:

Fluxa Filtri S.p.A
Viale De GASPERI,88/B
20017, Mazzo di Rho
Milano
Tel: +39 (0)2 93959.1
E: info@fluxafiltri.com
www.fluxafiltri.com



USA Office:

Envirogen Technologies Inc
PO Box 5419
Kingwood, TX 7735-5419
Tel: +1 877.312.8950
E: info@envirogen.com
www.envirogen.com

