

# Carbopor CP Series Activated Carbon Filter Cartridges

Activated carbon, a porous substance with strong physical adsorption forces, has the highest volume of adsorbing porosity of any material known to mankind. By carbonisation and activation. Activated carbon can be made from many substances containing high carbon content such as coal, wood, bamboo and coconut shells. Activated carbon filters are widely applied in industrial process and civil use as the most efficient method of removing odours, chlorine, volatile organic compounds (VOC), colours, tastes and other contaminants from fluids.

Carbopor CP Series uses the new generation of carbon cartridges produced by extrusion process, provide long service life and superior adsorption performance compared to conventional granular activated carbon cartridges together with minimum fines. With high mechanical strength and low ash content, the carbon block structure prevents channelling, bypassing, fluidizing or unloading of carbon fines. To prevent premature plugging of the activated carbon layer the carbopor filters incorporate an effective pre-filtration layer designed to intercept gels and large particle.

Carbopor CP Series activated carbon filter cartridges use premium grade coconut shell extruded carbon blocks and can be supplied in any length and end cap configuration to meet the requirements of the process application.

Polymeric and Elastomeric materials meet US FDA Title 21 requirements.

LD filter cartridges are suitable for all Big Blue filter housings.




## Applications

- PCB solutions
- Plating and coating solutions
- Industrial water treatment
- Drinking water treatment
- Chlorine and VOC removal
- Tastes, odours and organic pigments reduction
- Chlorinated compounds reduction
- Oils and aromatic compounds removal

## Cartridge Specifications and Performance Data

Product Name	Maximum Dimensions	Micron Rating (Nominal)	Initial $\Delta p$ (psi @ flow rate lpm)	Chlorine reduction @ flow rate lpm
Carbopor CP-10E	70mm OD x 27mm ID x 250mm 380g	5	1.4 psi @ 4 lpm	>23,000 litres @ 4lpm
Carbopor CP-20E	70mm OD x 27mm ID x 508mm 760g	5	1.5 psi @ 8 lpm	>46,000 litres @ 8 lpm
Carbopor CP-30E	70mm OD x 27mm ID x 762mm 1140g	5	1.5psi @ 15 lpm	>69,000 litres @ 15 lpm
Carbopor CP-40E	70mm OD x 27mm ID x 1016mm 1520g	5	1.5 psi @ 20 lpm	>92,000 litres @ 20 lpm
Carbopor CP-10-LD	115mm OD x 27mm ID x 250mm 1200g each	5	1.75 psi @ 8 lpm	>85,000 litres @ 8 lpm
Carbopor CP-20-LD	115mm OD x 27mm ID x 508mm 2400g each	5	2.6 psi @ 16 lpm	>155,000 litres @ 16 lpm

Cartridge Weights quoted are approximate and for guidance only

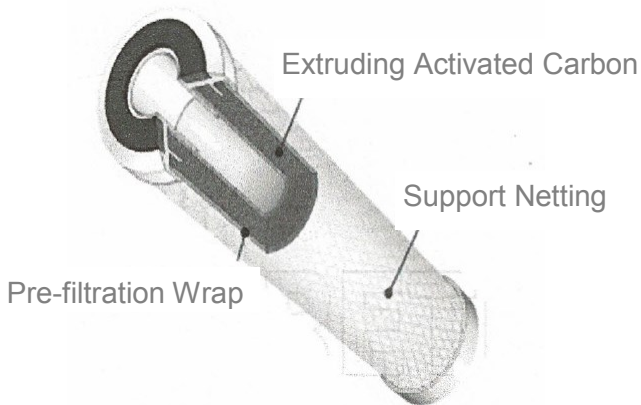

**Warning:** For drinking water applications, do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

**Note:** The CP cartridge will contain a very small amount of carbon fines (very fine black powder) and a new cartridge after installation should be flushed with sufficient water to remove traces of the fines from your water system before using the water. It is recommended that you run (flush) for at least 20 seconds prior to using water

**\*Note:** Estimated capacity tested at given flow rate using 2 ppm free available chlorine at continuous flow to with greater than 90% reduction

**Note:** Increased flow rates may result in less effective chlorine reduction.

**Note:** Micron ratings are based on 85% removal of given particle size.

## Carbopor CP Ordering Guide

Name	Nominal Length	End Cap Type	Seal Type	Special
CP	5"	3	E-EPDM	BB-Big Blue*
	10"	4		
	20"	8		
	30"			
	40"			

\* Only available in 10" and 20"

**Ordering Guide Example: CP-10-4E**

**European Manufacturing, Sales & Service**  
Envirogen Group  
Unit 9, Wimsey Way, Alfreton Trading Estate,  
Alfreton, Derbyshire DE55 4LS,  
United Kingdom  
T: +(0)1531 636328  
E: info@envirogen.com

**European Sales & Distribution**  
Envirogen Technologies BV  
Penningweg 71, 1507 DG Zaandam,  
The Netherlands  
T: +31 (0)75 204 72 00  
E: ninfo@envirogen.com

**Middle East Sales & Distribution**  
Envirogen Group  
Block 115, Road 1510,  
Building 737, Office 81,  
Hidd, Kingdom of Bahrain  
T: +973 13107790  
E: infobahrain@envirogen.com